

(map 25)

## MARYLAND HISTORICAL TRUST WORKSHEET

NOMINATION FORM  
for the  
NATIONAL REGISTER OF HISTORIC PLACES, NATIONAL PARKS SERVICE

AA-212

<b>1. NAME</b>					
COMMON: "Arden"					
AND/OR HISTORIC:					
<b>2. LOCATION</b>					
STREET AND NUMBER: West Side of Harwood Road					
CITY OR TOWN: 1 1/2 Miles North of Harwood					
STATE: Maryland			COUNTY: Anne Arundel		
<b>3. CLASSIFICATION</b>					
CATEGORY (Check One)		OWNERSHIP		STATUS	ACCESSIBLE TO THE PUBLIC
<input type="checkbox"/> District <input checked="" type="checkbox"/> Building <input type="checkbox"/> Site <input type="checkbox"/> Structure <input type="checkbox"/> Object		<input type="checkbox"/> Public <input checked="" type="checkbox"/> Private <input type="checkbox"/> Both		<input checked="" type="checkbox"/> Occupied <input type="checkbox"/> Unoccupied <input type="checkbox"/> Preservation work in progress	Yes: <input type="checkbox"/> Restricted <input type="checkbox"/> Unrestricted <input checked="" type="checkbox"/> No
PRESENT USE (Check One or More as Appropriate)					
<input type="checkbox"/> Agricultural <input type="checkbox"/> Commercial <input type="checkbox"/> Educational <input type="checkbox"/> Entertainment		<input type="checkbox"/> Government <input type="checkbox"/> Industrial <input type="checkbox"/> Military <input type="checkbox"/> Museum		<input type="checkbox"/> Park <input checked="" type="checkbox"/> Private Residence <input type="checkbox"/> Religious <input type="checkbox"/> Scientific	<input type="checkbox"/> Transportation <input type="checkbox"/> Other (Specify) _____ _____ _____
<input type="checkbox"/> Comments _____ _____ _____					
<b>4. OWNER OF PROPERTY</b>					
OWNER'S NAME: Cmdr. and Mrs. Eric S. Purdon (Phone 867-0355)					
STREET AND NUMBER:					
CITY OR TOWN: Harwood			STATE: Maryland		20776
<b>5. LOCATION OF LEGAL DESCRIPTION</b>					
COURTHOUSE, REGISTRY OF DEEDS, ETC:					
STREET AND NUMBER:					
CITY OR TOWN: Map #63, A.D. #1, Parcel #2, Liber/Folio #1381/27			STATE: Maryland		
Title Reference of Current Deed (Book & Pg. #):					
<b>6. REPRESENTATION IN EXISTING SURVEYS</b>					
TITLE OF SURVEY:					
DATE OF SURVEY: <input type="checkbox"/> Federal <input type="checkbox"/> State <input type="checkbox"/> County <input type="checkbox"/> Local					
DEPOSITORY FOR SURVEY RECORDS:					
STREET AND NUMBER:					
CITY OR TOWN:			STATE:		

SEE INSTRUCTIONS

7. DESCRIPTION						
CONDITION	(Check One)					
	<input checked="" type="checkbox"/> Excellent	<input type="checkbox"/> Good	<input type="checkbox"/> Fair	<input type="checkbox"/> Deteriorated	<input type="checkbox"/> Ruins	<input type="checkbox"/> Unexposed
	(Check One)		(Check One)			
	<input type="checkbox"/> Altered	<input checked="" type="checkbox"/> Unaltered	<input type="checkbox"/> Moved	<input checked="" type="checkbox"/> Original Site		
DESCRIBE THE PRESENT AND ORIGINAL (If known) PHYSICAL APPEARANCE						
<p>"Arden" was built in 1842 by James Murray, a young and prominent physician of West River.</p> <p>Dr. Murray had built a fine house in Owensville in 1838 ("Smith's Purchase", AA-36-Q-e); he had set up his office there and had married a Miss Belt from Howard County. In about 1840 a tragedy occurred; his wife was killed by a fall down the cellar steps.</p> <p>Dr. Murray married again, this time to one of the daughters of Dr. James Cheston of "Hawthorne Ridge" (AA-34-N-a). The couple were given, by Cheston, a piece of land on which to build.</p> <p>The new house, "Arden", was designed to be all on one floor, to prevent a possible recurrence of the first Mrs. Murray's accident. The source of the design is not known though it is reminiscent of a Louisiana style plantation house. It is a radical departure from the traditional styles of Southern Maryland Architecture. From a critical point of view it was an interesting and relatively successful architectural experiment, though still better suited to hotter climates.</p> <p>The main roof covers a deep verandah which extends around the front and sides of the house. The entrance opens into a wide center hall with the living room on its south side and the dining room on the north. The hall is divided toward the back of the house by a pair of shutter doors. Beyond them are the steps to the attic (now finished into bedrooms and storage space). The first floor bedrooms are on either side of the rear hall, and the breezeway to the kitchen is reached at the end of the hall. The floor plan of the house is simple and nearly symmetrical. The interior details are elegant; very high ceilings, black marble mantels and floors of wide planks of Georgia Pine. The front windows in the living and dining rooms have jib doors which give access to the verandah. The bedrooms also have doors onto the verandah.</p> <p>The kitchen is reached by a breeze-way containing a pantry. The kitchen fireplace has been rebuilt but its chimney is original. The small room above the kitchen is reached by a narrow enclosed stair.</p> <p>Dr. Murray built an office near the house. It is heated by a small iron stove. A stable was also built at the same time. The occupants of "Arden" have been "gentleman farmers" if farmers at all so the agricultural character of many rural homes is missing here. The house is reached from the road through dense woods and there are no distant views of fields. The very suitable same "Arden" was chosen at a dinner party at "Lothian" (AA-38-O-b) soon after the house was built. Dr. Murray preferred it over the other choice, "Longwood", so he raised both hands when the vote was taken. (The source of this story is a letter written by Murray and still in the possession of a member of the family. The list of materials for the house and other records have also been preserved.)</p>						
Continued on separate page						

SEE INSTRUCTIONS

## 8. SIGNIFICANCE

PERIOD (Check One or More as Appropriate)

- ☐ Pre-Columbian      ☐ 16th Century      ☐ 18th Century      ☐ 20th Century  
☐ 15th Century      ☐ 17th Century      ☒ 19th Century

SPECIFIC DATE(S) (If Applicable and Known) 1842

**AREAS OF SIGNIFICANCE** (Check One or More as Appropriate)

- |  |                                       |   |  |
|--|---------------------------------------|---|--|
| <input type="checkbox"/> Aboriginal              | <input type="checkbox"/> Education    | <input type="checkbox"/> Political      | <input type="checkbox"/> Urban Planning  |
| <input type="checkbox"/> Prehistoric             | <input type="checkbox"/> Engineering  | <input type="checkbox"/> Religion/Phi-  | <input type="checkbox"/> Other (Specify) |
| <input type="checkbox"/> Historic                | <input type="checkbox"/> Industry     | losophy                                 | _____                                    |
| <input type="checkbox"/> Agriculture             | <input type="checkbox"/> Invention    | <input type="checkbox"/> Science        | _____                                    |
| <input checked="" type="checkbox"/> Architecture | <input type="checkbox"/> Landscape    | <input type="checkbox"/> Sculpture      | _____                                    |
| <input type="checkbox"/> Art                     | <input type="checkbox"/> Architecture | <input type="checkbox"/> Social/Human-  | _____                                    |
| <input type="checkbox"/> Commerce                | <input type="checkbox"/> Literature   | itarian                                 | _____                                    |
| <input type="checkbox"/> Communications          | <input type="checkbox"/> Military     | <input type="checkbox"/> Theater        | _____                                    |
| <input type="checkbox"/> Conservation            | <input type="checkbox"/> Music        | <input type="checkbox"/> Transportation | _____                                    |

STATEMENT OF SIGNIFICANCE

SEE INSTRUCTIONS

## 9. MAJOR BIBLIOGRAPHICAL REFERENCES

- 1) Conversation: Cmdr. & Mrs. Purdon, 11/74  
 2) Conversation: E. Churchill Murray, 11/74

## 10. GEOGRAPHICAL DATA

LATITUDE AND LONGITUDE COORDINATES DEFINING A RECTANGLE LOCATING THE PROPERTY				OR	LATITUDE AND LONGITUDE COORDINATES DEFINING THE CENTER POINT OF A PROPERTY OF LESS THAN TEN ACRES				
CORNER	LATITUDE				LONGITUDE				
	Degrees	Minutes	Seconds	Degrees	Minutes	Seconds	Degrees	Minutes	Seconds
NW	0	'	"	0	'	"	0	'	"
NE	0	'	"	0	'	"	0	'	"
SE	0	'	"	0	'	"	0	'	"
SW	0	'	"	0	'	"	0	'	"

APPROXIMATE ACREAGE OF ~~PROPERTY~~ PROPERTY: **83 acres**

Acreage Justification:

SEE INSTRUCTIONS

## 11. FORM PREPARED BY

NAME AND TITLE:	
ORGANIZATION	DATE
STREET AND NUMBER:	
CITY OR TOWN:	STATE

## 12. State Liaison Officer Review: (Office Use Only)

Significance of this property is:

National ☐ State ☐ Local ☐

Signature \_\_\_\_\_

"Arden"  
West Side of Harwood Road  
1 1/2 miles North of Harwood  
Maryland Anne Arundel

## OWNER:

CMDR. and Mrs. Eric S. Purdon  
Harwood, Maryland 20776

Phone 867-0355

# 7 continued

James Murray's daughter, Miss Meta Murray, lived in the house until 1940. It was then sold three times before the present owners bought it in 1960. Major improvements such as electricity, central heat, plumbing and insulation were made in the 1940's but the house retains its original appearance and character.

# Survey of "Arden Slave House", Harwood. Wd

Oral history claims it to be a "slave-occupied house", i.e. pre-1864 in Wd.


"Miss Meta" was the last Murray to live here, house built by her grandfather J., then occupied by his son Dan, then Dan's daughter Meta until 1940. In 1960 Pardon's bought it.

This, according to Miss Meta who related much of her story to Ellen Shepherd Sr. (who died 1984); also gave Mrs Shepherd her old photo album of Arden. (Check with <sup>Miss Meta's daughter</sup> Ellen Shepherd for info she may have or know);

Per Miss Meta - per Mrs Shepherd - per Mrs. Pardon: the "slave house" was occupied (until the 1940s) by "Uncle Wes", who had been a slave ~~there~~ at Arden before emancipation.

## "SLAVE HOUSE"

Physical survey: located some distance north of main house  
Dimensions: 14' x 22' (main block) facing toward <sup>Grand house</sup> it, south

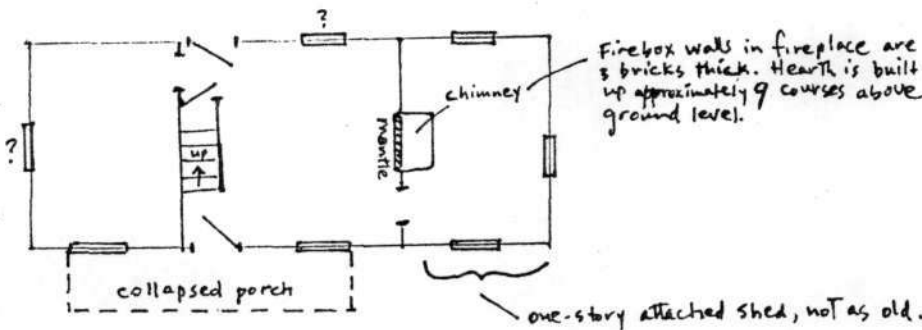

FIRST FLOOR PLAN  
(2nd floor, same room layout exc no attached shed east side.)  
NOT TO SCALE


↓  
South

The house is sheathed in clapboards which appear to be original, attached with cut nails, including the clapboards which are on the cross-gabled dormer over front door.

Clapboards are circular-sawn except for a couple of newer

replacement <sup>clap</sup>boards over the front door.

Roof timbers are butt-jointed,  
Covered with wood shingles.

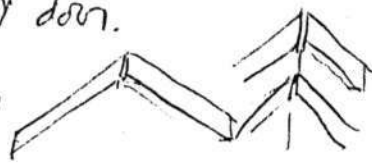

All interior walls were originally plastered over machine cut lathes. After turn of century, plaster was covered with horizontal beaded tongue-and-groove paneling (2 rows per board, painted white (or white washed?))

The building is raised up on brick piers, 9 courses high, 4 evenly spaced along <sup>the</sup> long sides, 3 along short sides. The stairway (boxed in below with a short closet door underneath) hugs the interior partition wall, no railing.

Windows are double hung 6 over 6, except 2nd story dormer window which is 6 over 3. <sup>There's</sup> a 1-story shed-roof addition, east end.

analysis: Open hearth fireplace with simple wood mantle suggests pre-1880 as do the modern cut nails in clapboards and structural members.


Circular sawn clapboards could date to 1860?

The building is badly deteriorated and barely still standing. In fact, the only thing preventing the beams in the large 1st floor room from collapsing <sup>onto the floor</sup> is a wooden ~~box~~ cupboard (6 feet high made of very wide boards) which is standing in center of room - it is a free-standing piece of furniture on which the center <sup>ceiling</sup> beam has settled. The floors ~~and~~ are rotten, not safe.

\* This is only the 4th "black" house I've found with an open fireplace. I found none in Saleville, two in Cumberstone: "Daniel I" c. 1787 (Dry Neck) and Cedar Park c. 1840-18 and The Collinson Farm log house c. 1850.

larkfield rd

AA-212



Richardson Rd

tenant  
hse. (formerly)

barn

doctor's "surgery"

arden main Hse.

drive way

(old city road)

old county rd

slaves.  
(A)

Harwood Rd.


(new city road)

Stockette Run  
Brook

"ARDEN", A.A.Co. Ind. / S. Weatherill 3/86

- very rough sketch from memory

MARYLAND GRID NORTH

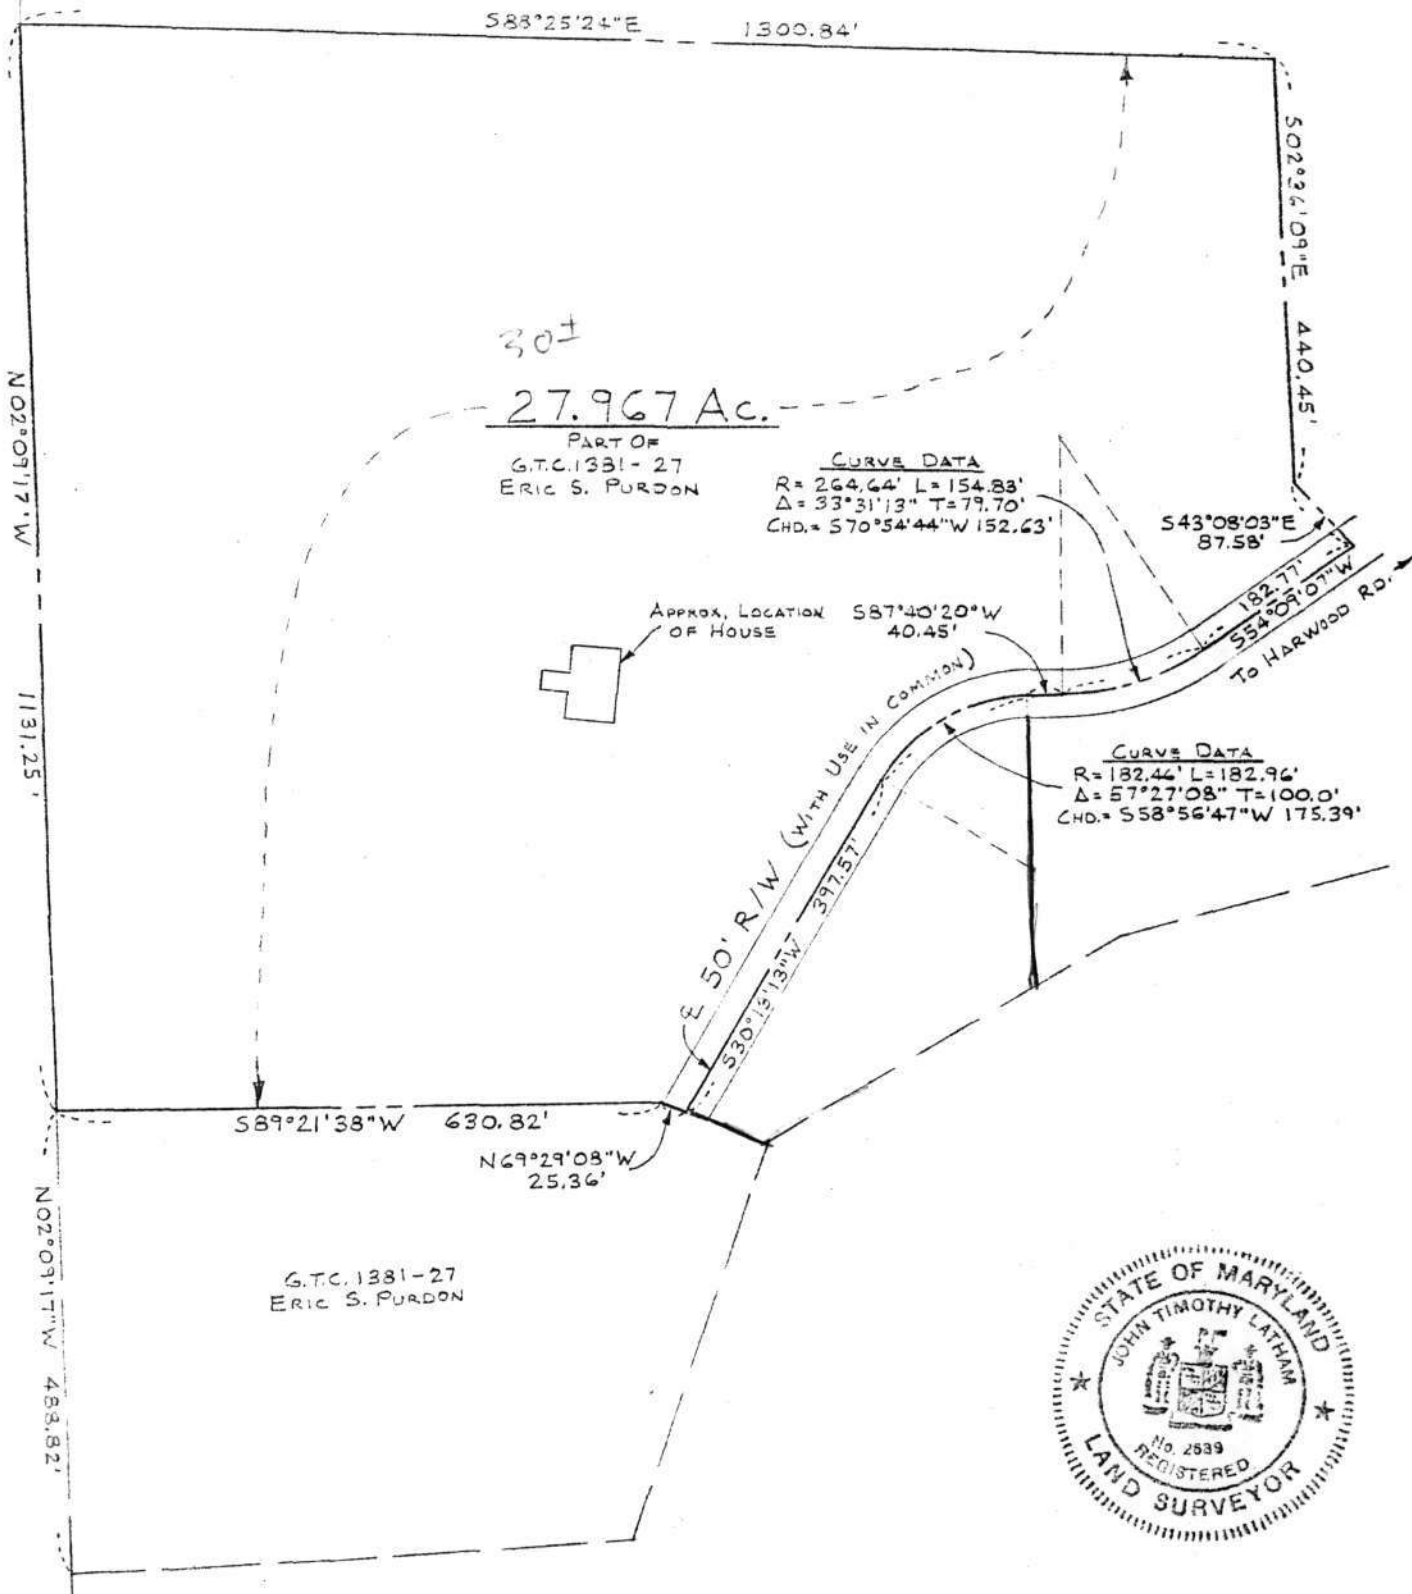

PLAT OF 27.967 AC.

PART OF THE ERIC S. PURDON, PROP.

"HARWOOD"

1ST. DISTRICT, A.A. COUNTY, MD.

J. R. McCrone, Jr., Inc.

REGISTERED PROFESSIONAL ENGINEERS  
AND SURVEYORS

ANNAPOLIS, MARYLAND

PRINCE FREDERICK CHESTERTOWN

TRAPPE LEONARDTOWN BOWIE


DRAWN BY GOTSCH

SCALE 1"=200'

DATE 4-8-77

JOB NO. 1458581

FOLDER PERLMAN, BEN

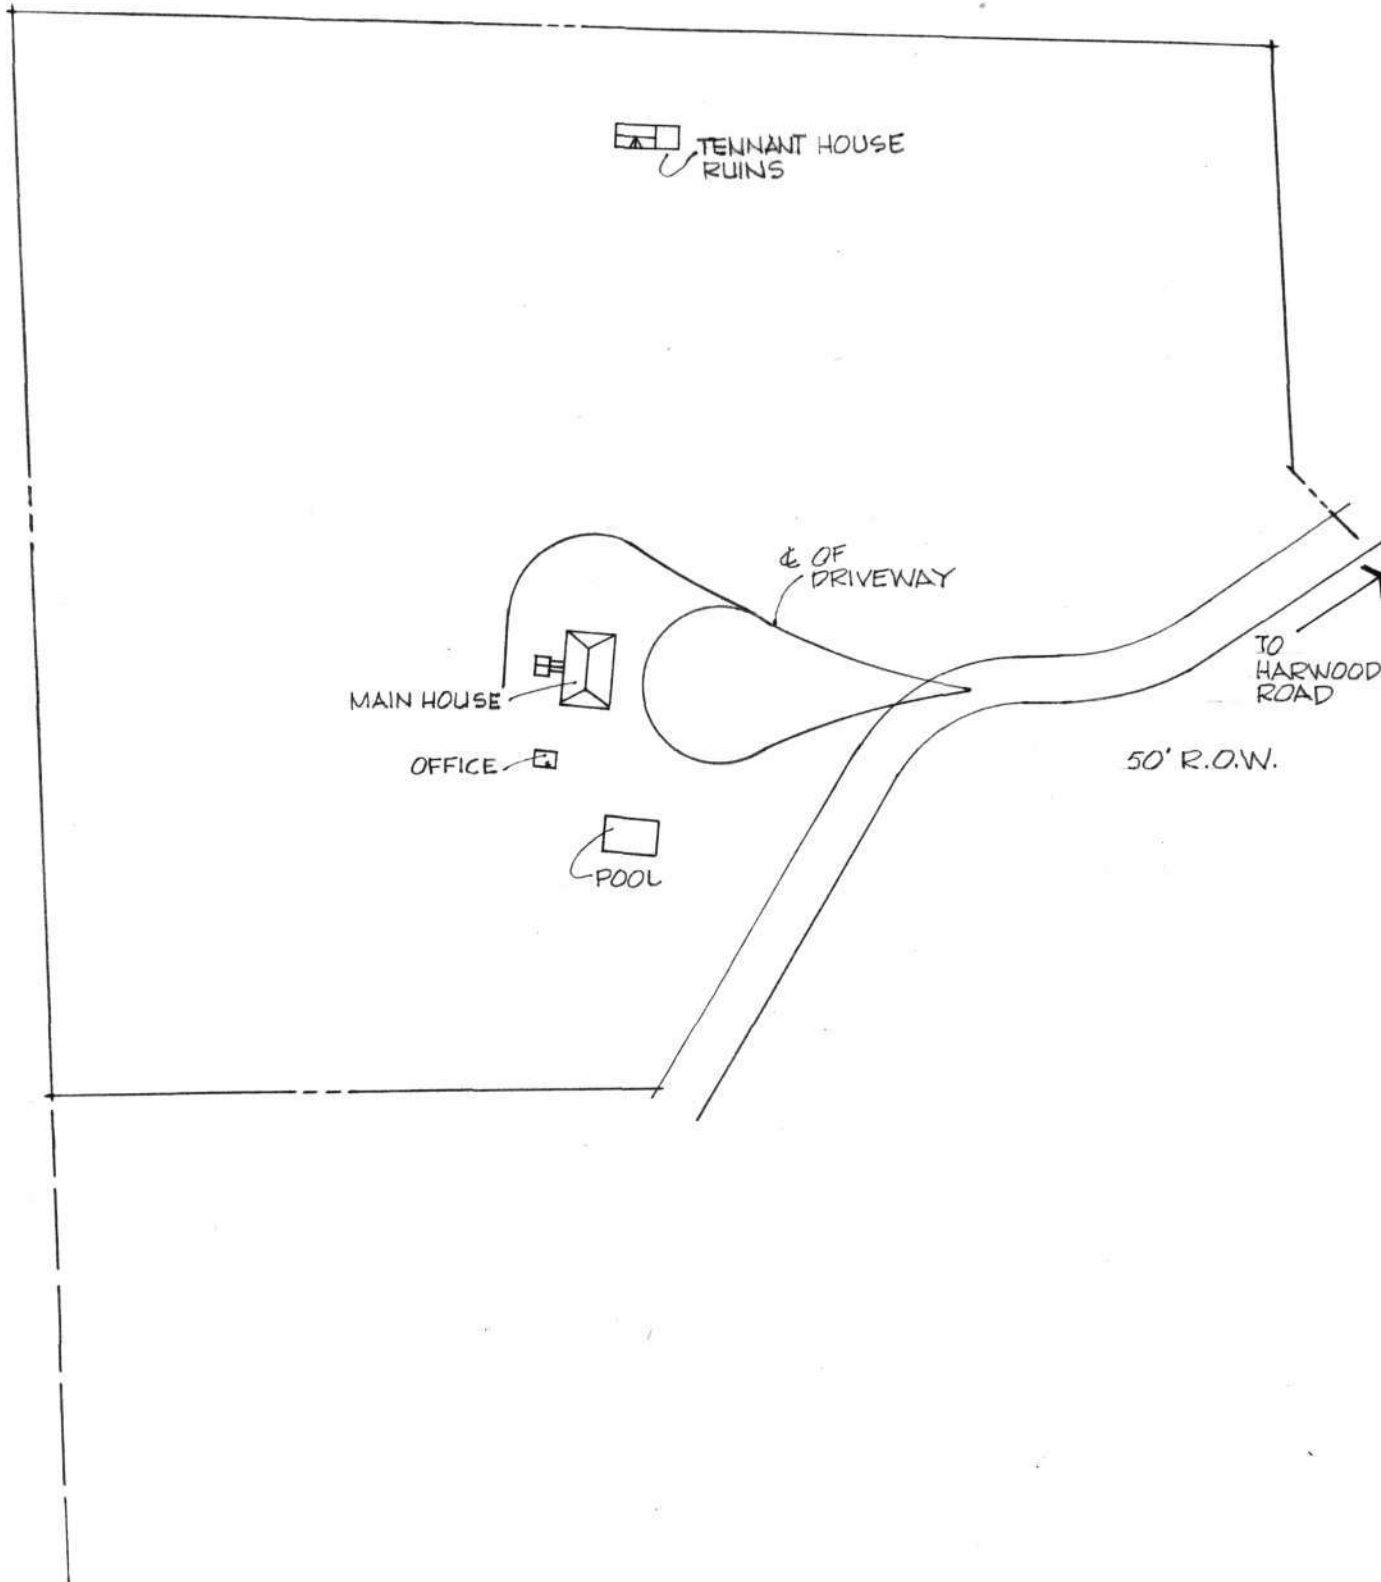


EASEMENT EXHIBIT NO.

SCALE:  
PREPARED:  
MARYLAND HISTORICAL TRUST



AA-212 & AA-212A  
Arden & Arden Slave House  
449 Harwood Road, Harwood  
Bowie Quadrangle

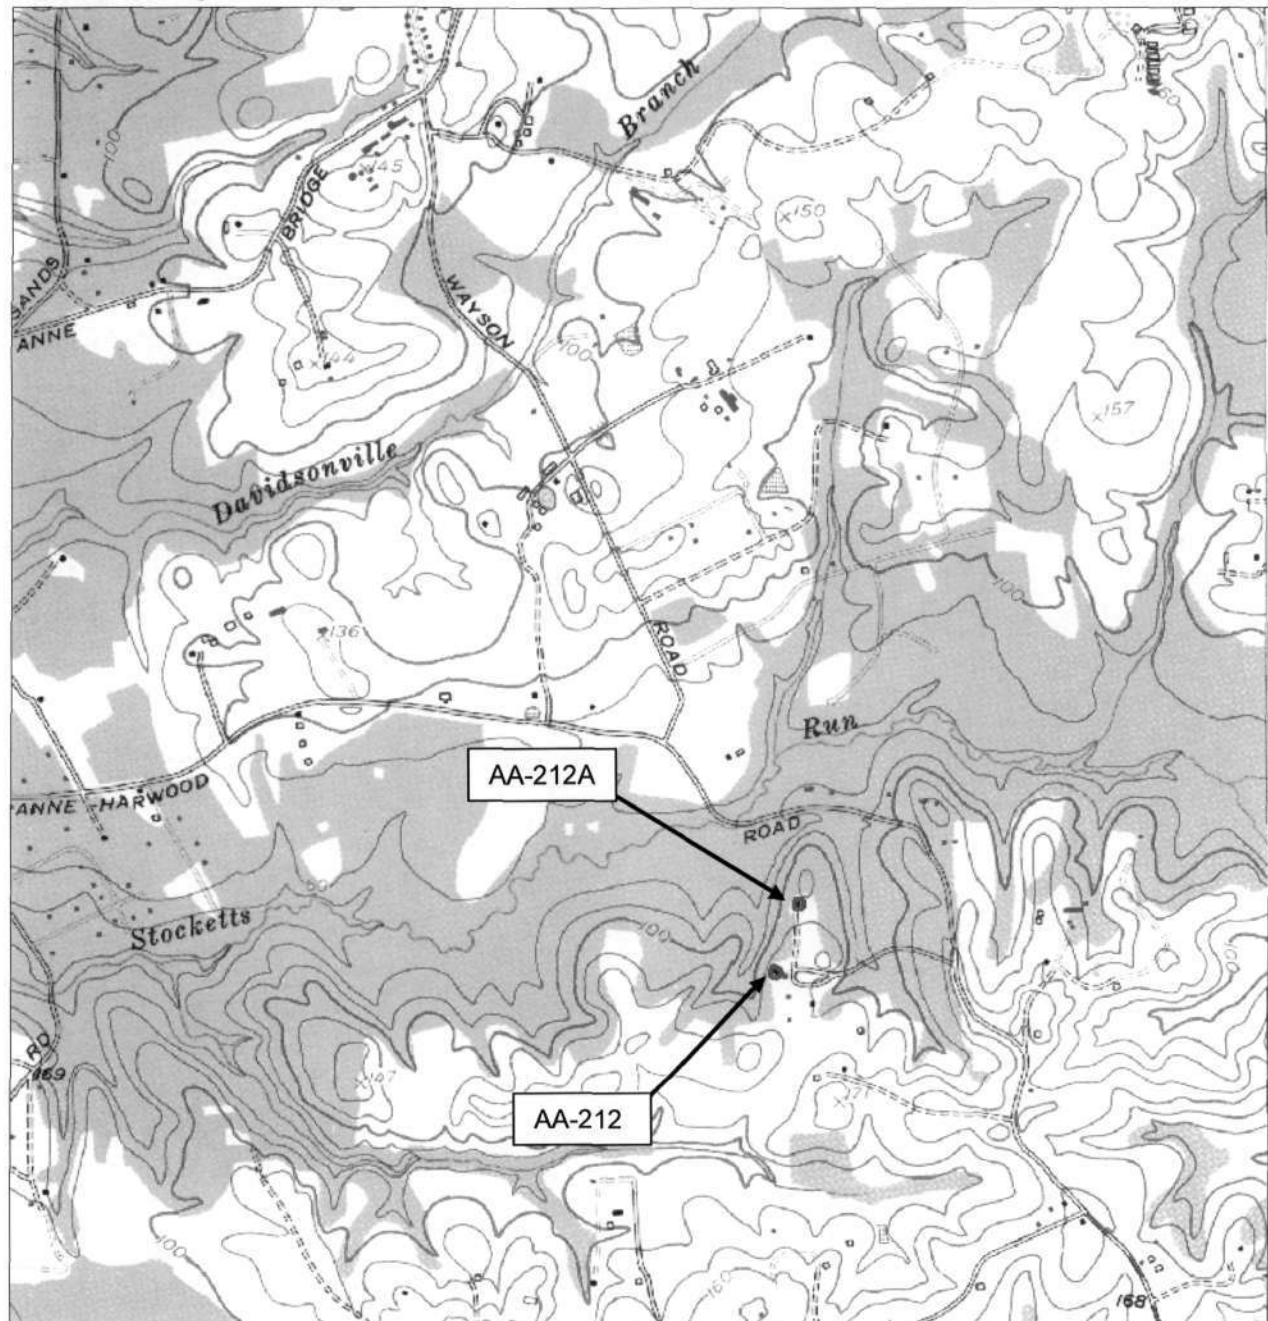



AA  
212

212  
AA - ~~33 Na~~  
(map 25)

Arden

N.E. corner

Amblatt 12/74



AA-  
212

~~all-33-N-a~~ (map 25):

AA-212  
"Arden"

Kitchen and breezeway

Amh 12-74



AA-  
212

~~AA-33 Na~~ (map 25)  
AA-212

"Arden"

The Stable

Amh 12-74



AA-  
212

212 (map 25)  
AA-~~33~~ N-2

"Arden"

Dr. Murray's Office

Amh 12-74



Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Entrance drive looking west toward  
Main House

SCALE:

PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Main House from Northeast

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





AA-212


Arden

Southeast elevation

Photo by J.A.C.

5/1977



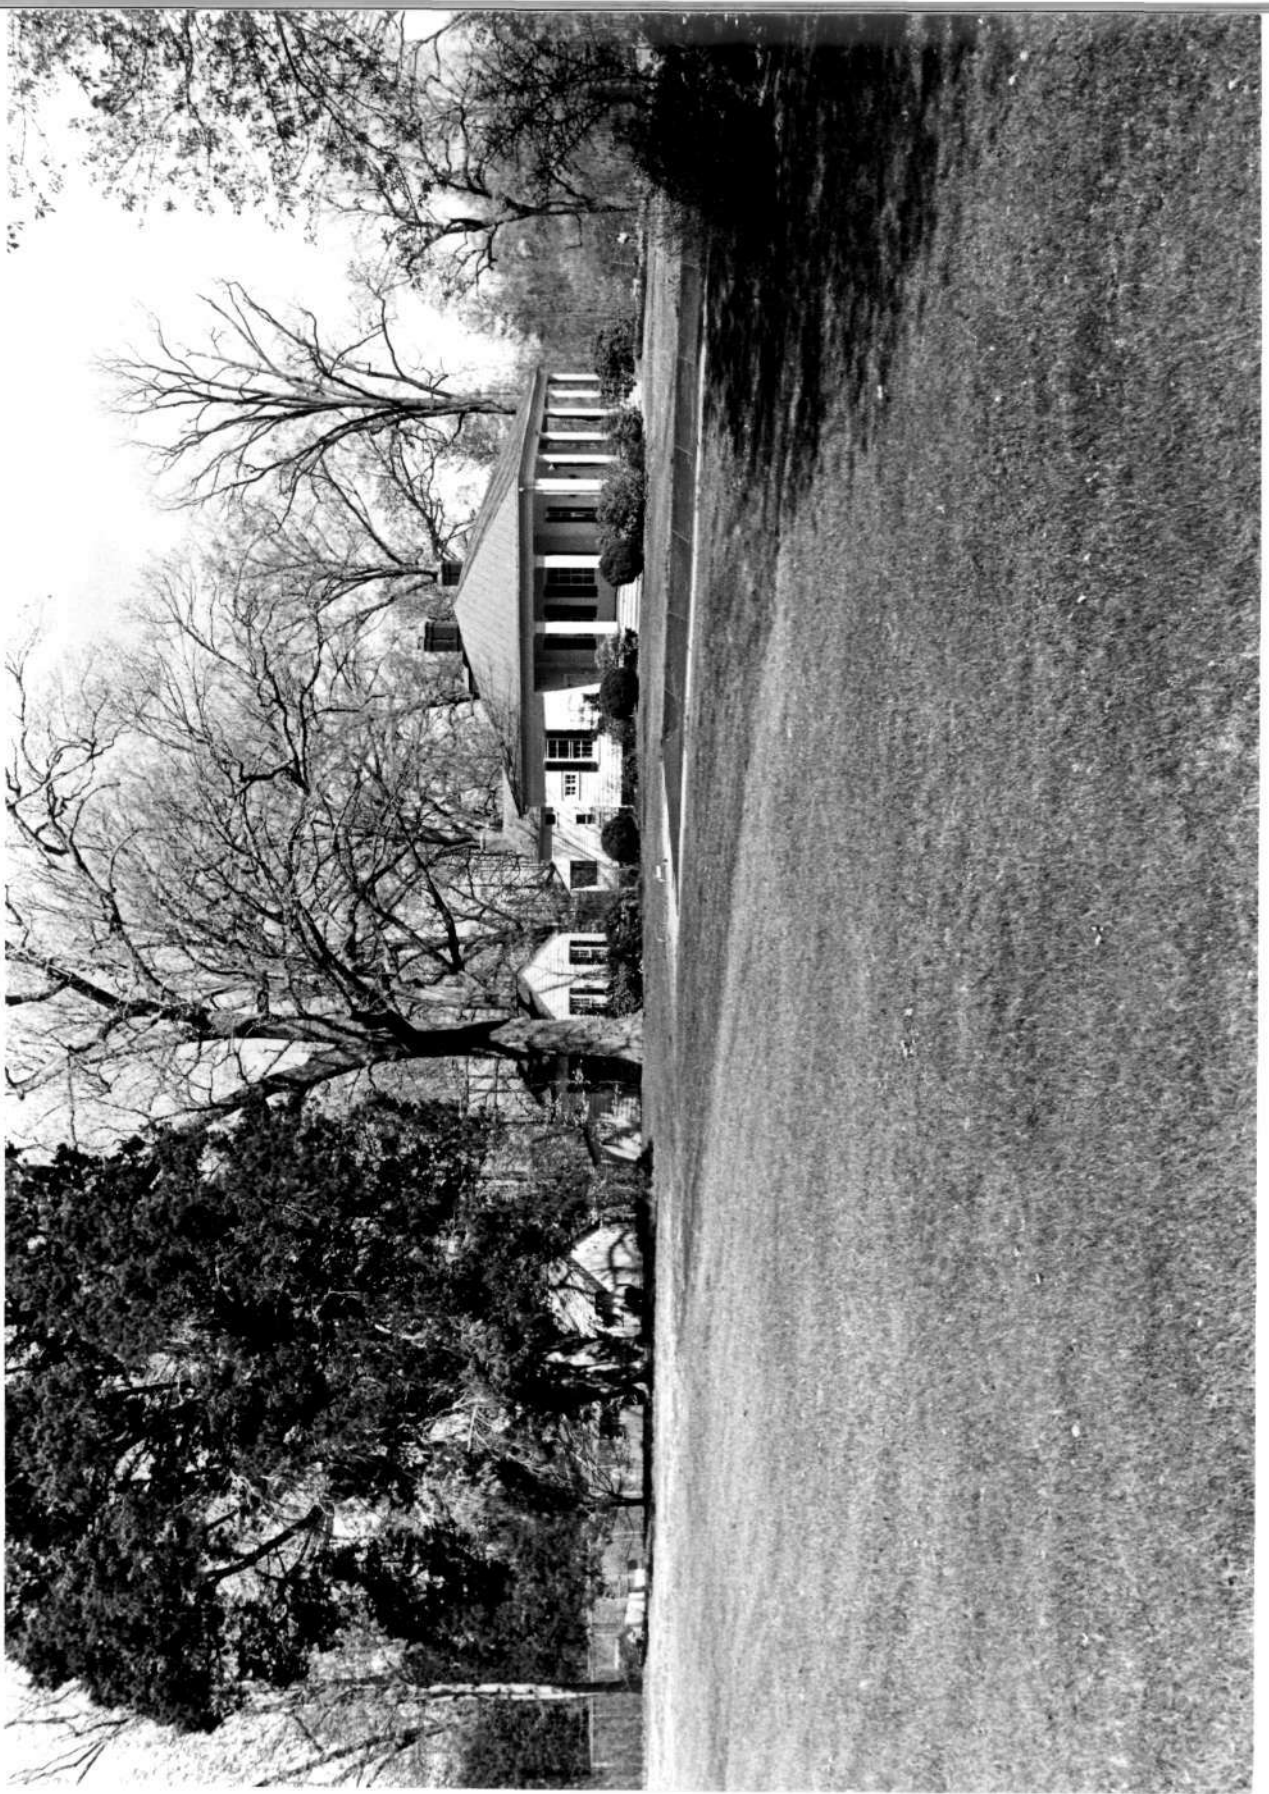

Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Main House from Southeast

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





AA-212

Arden

East facade Main House

Photo by J.A.C.

5/1977



Arden  
Harwood  
Anne Arundel County

AA-212


EASEMENT EXHIBIT NO.

Main House, East facade

SCALE:  
PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH



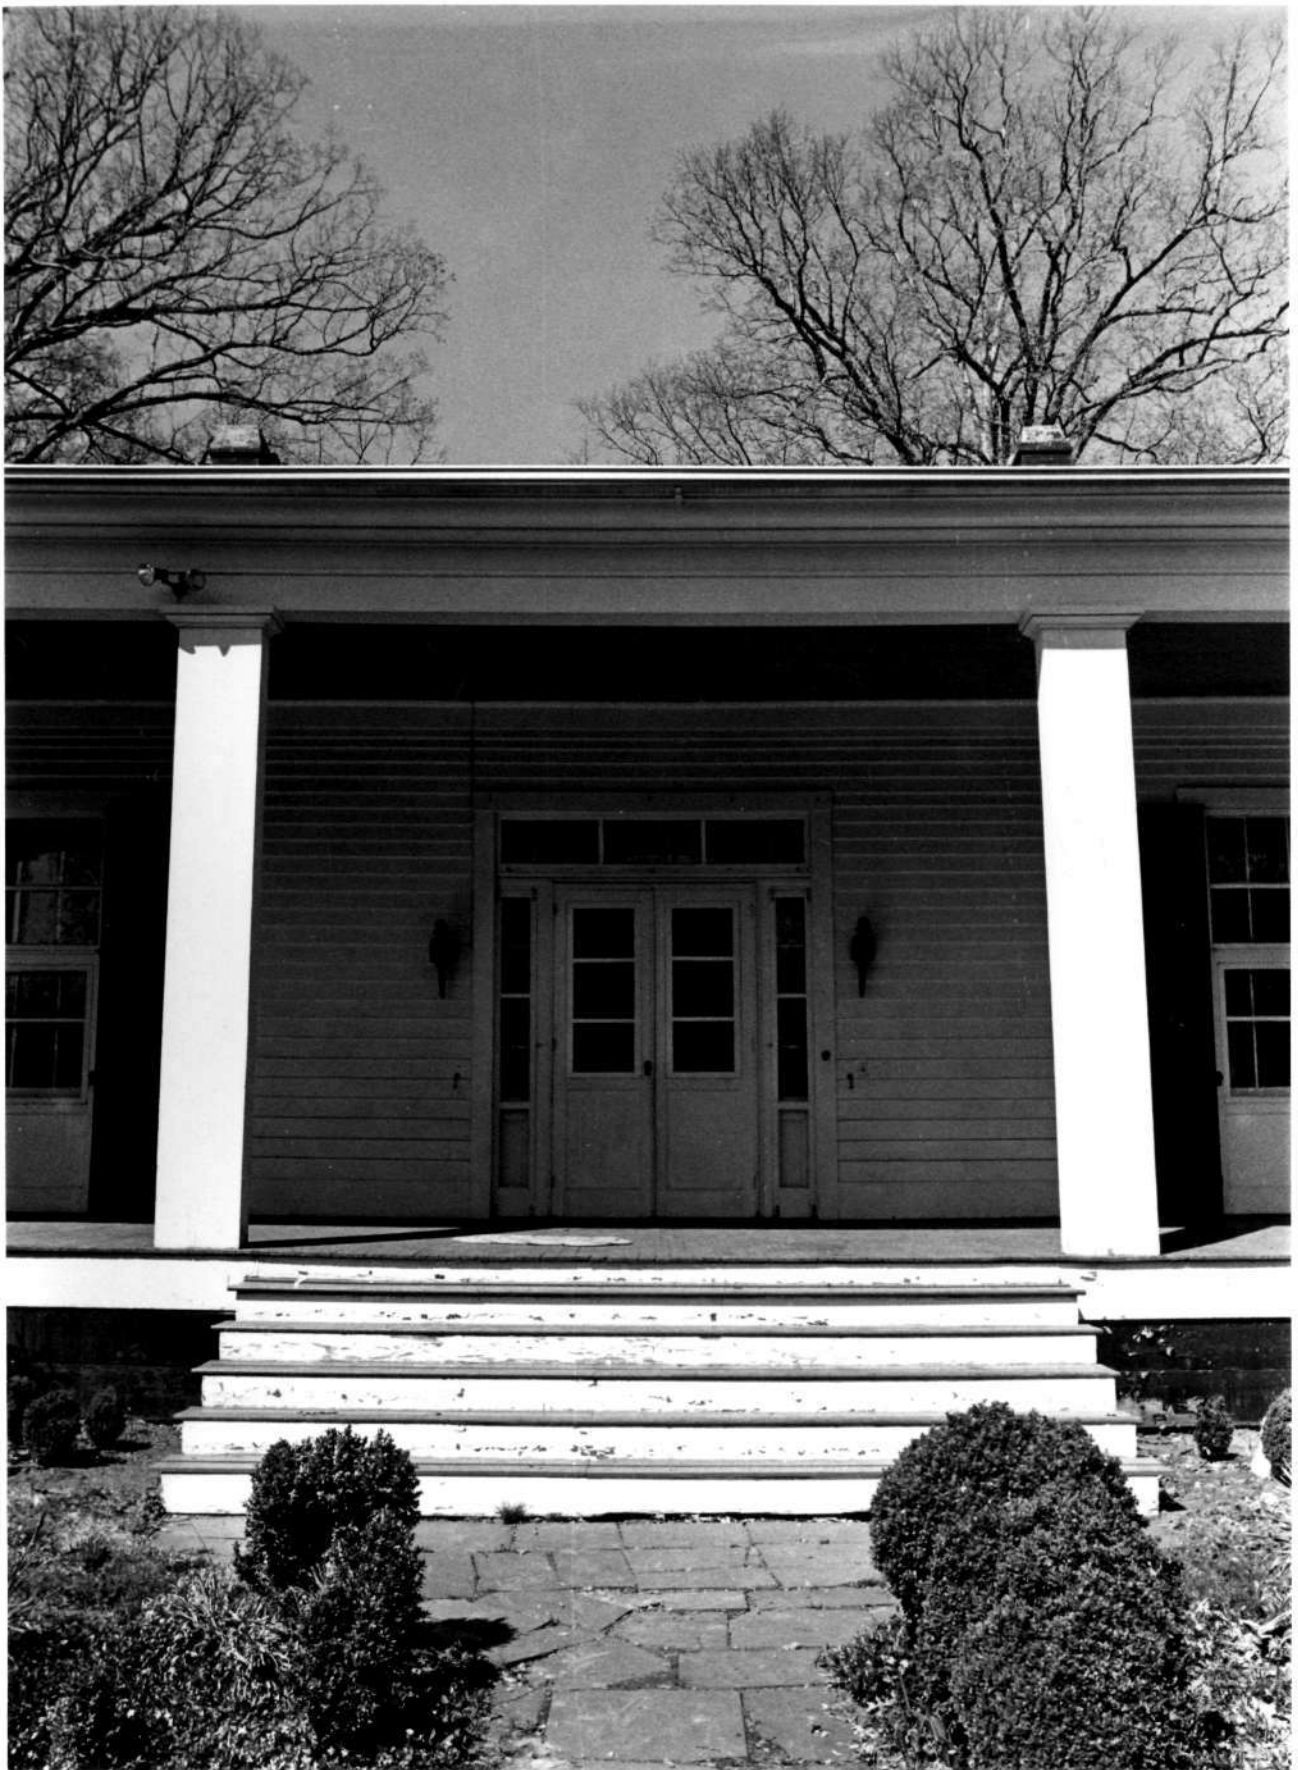

Arden  
Harwood  
Anne Arundel County

AA-212

Main House, East facade entrance  
detail

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

EASEMENT EXHIBIT NO. NA

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. MA

Main House, south facade

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Main House, West facade

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





AA-212

Arden

Northwest elevation

Photo by J.A.C.

5/1977



Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO.

Main House, North facade

SCALE:

PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH






AA-212

Arden

Northeast elevation

photo by J.A.C.

5/1977

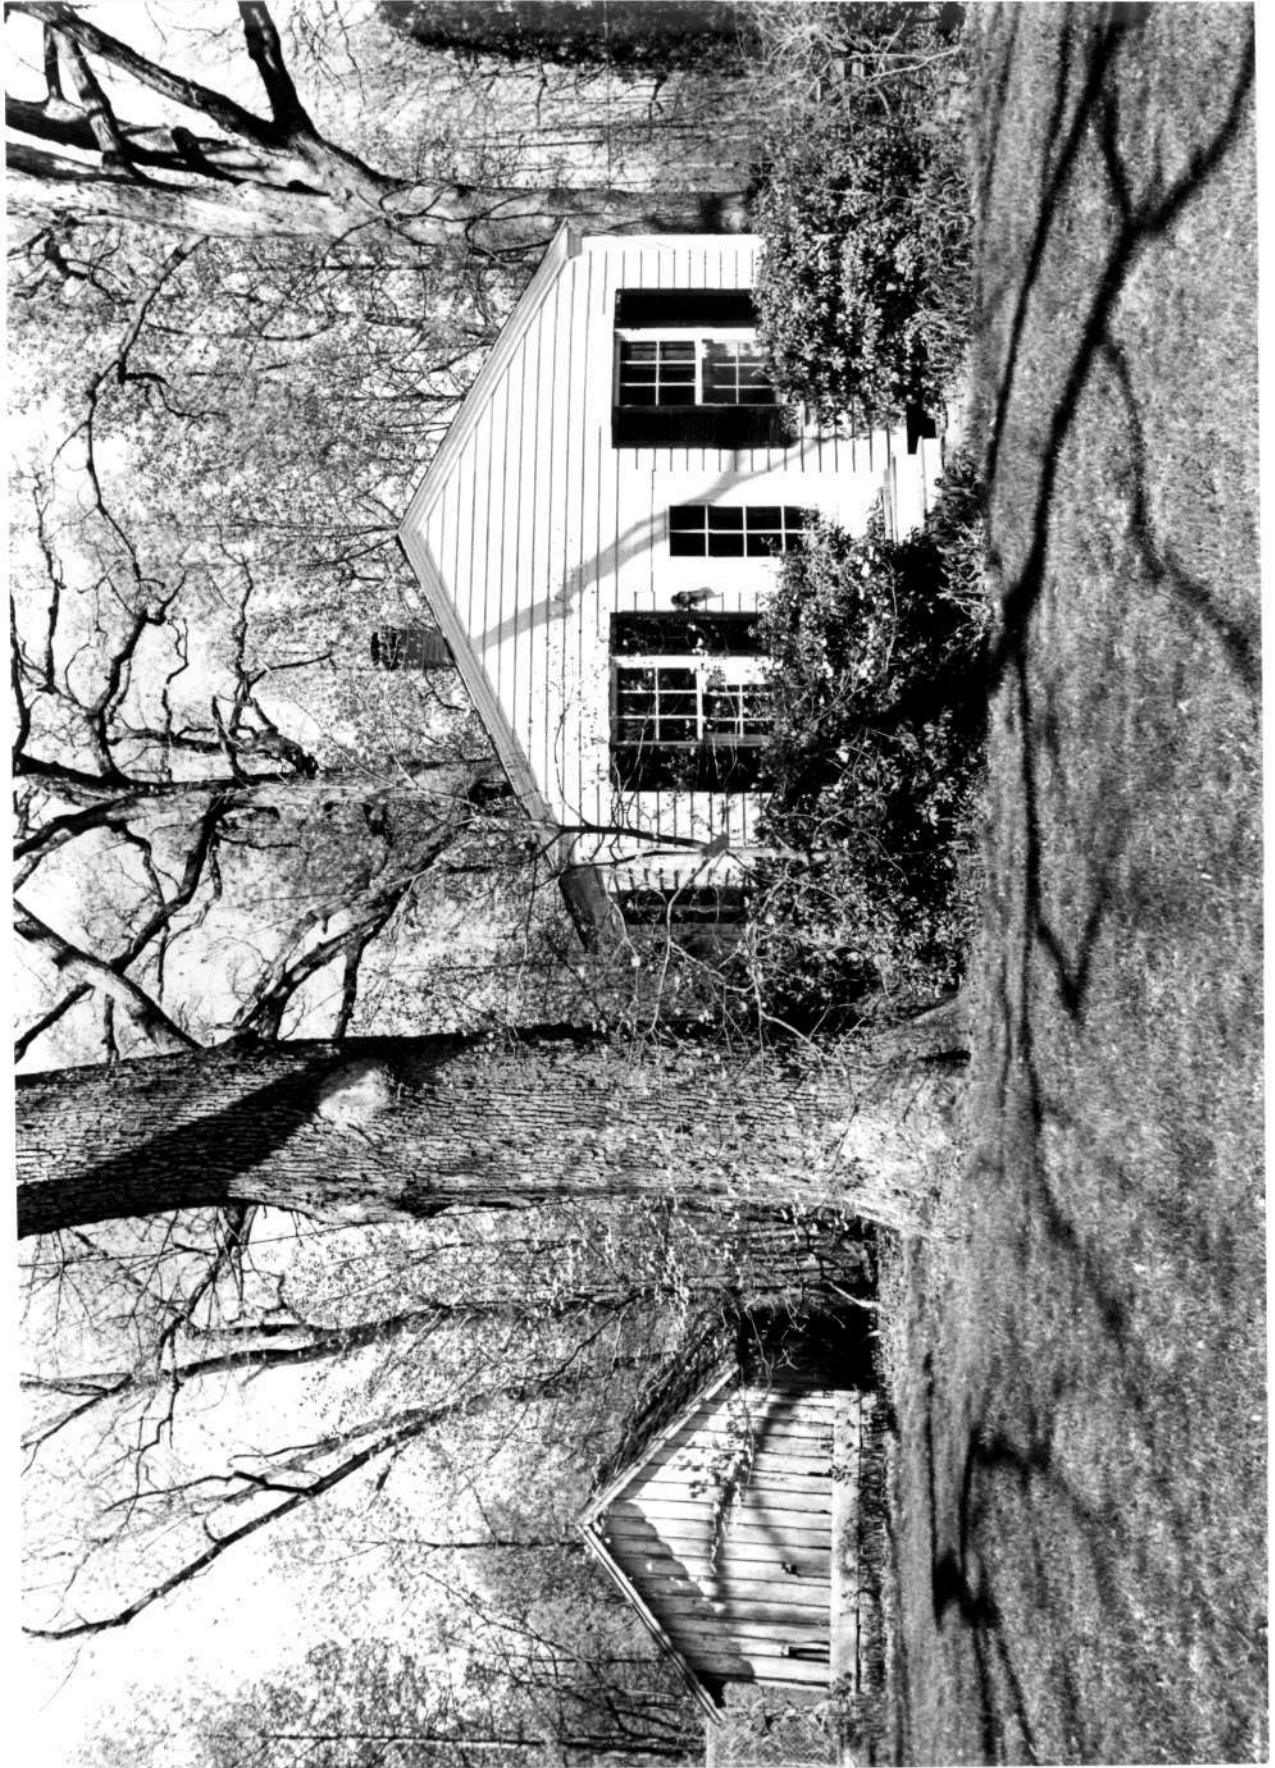

Arden  
Harwood  
Anne Arundel County

AA-212


EASEMENT EXHIBIT NO. NA

Office and outbuilding, east  
facades  
SCALE:

PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH



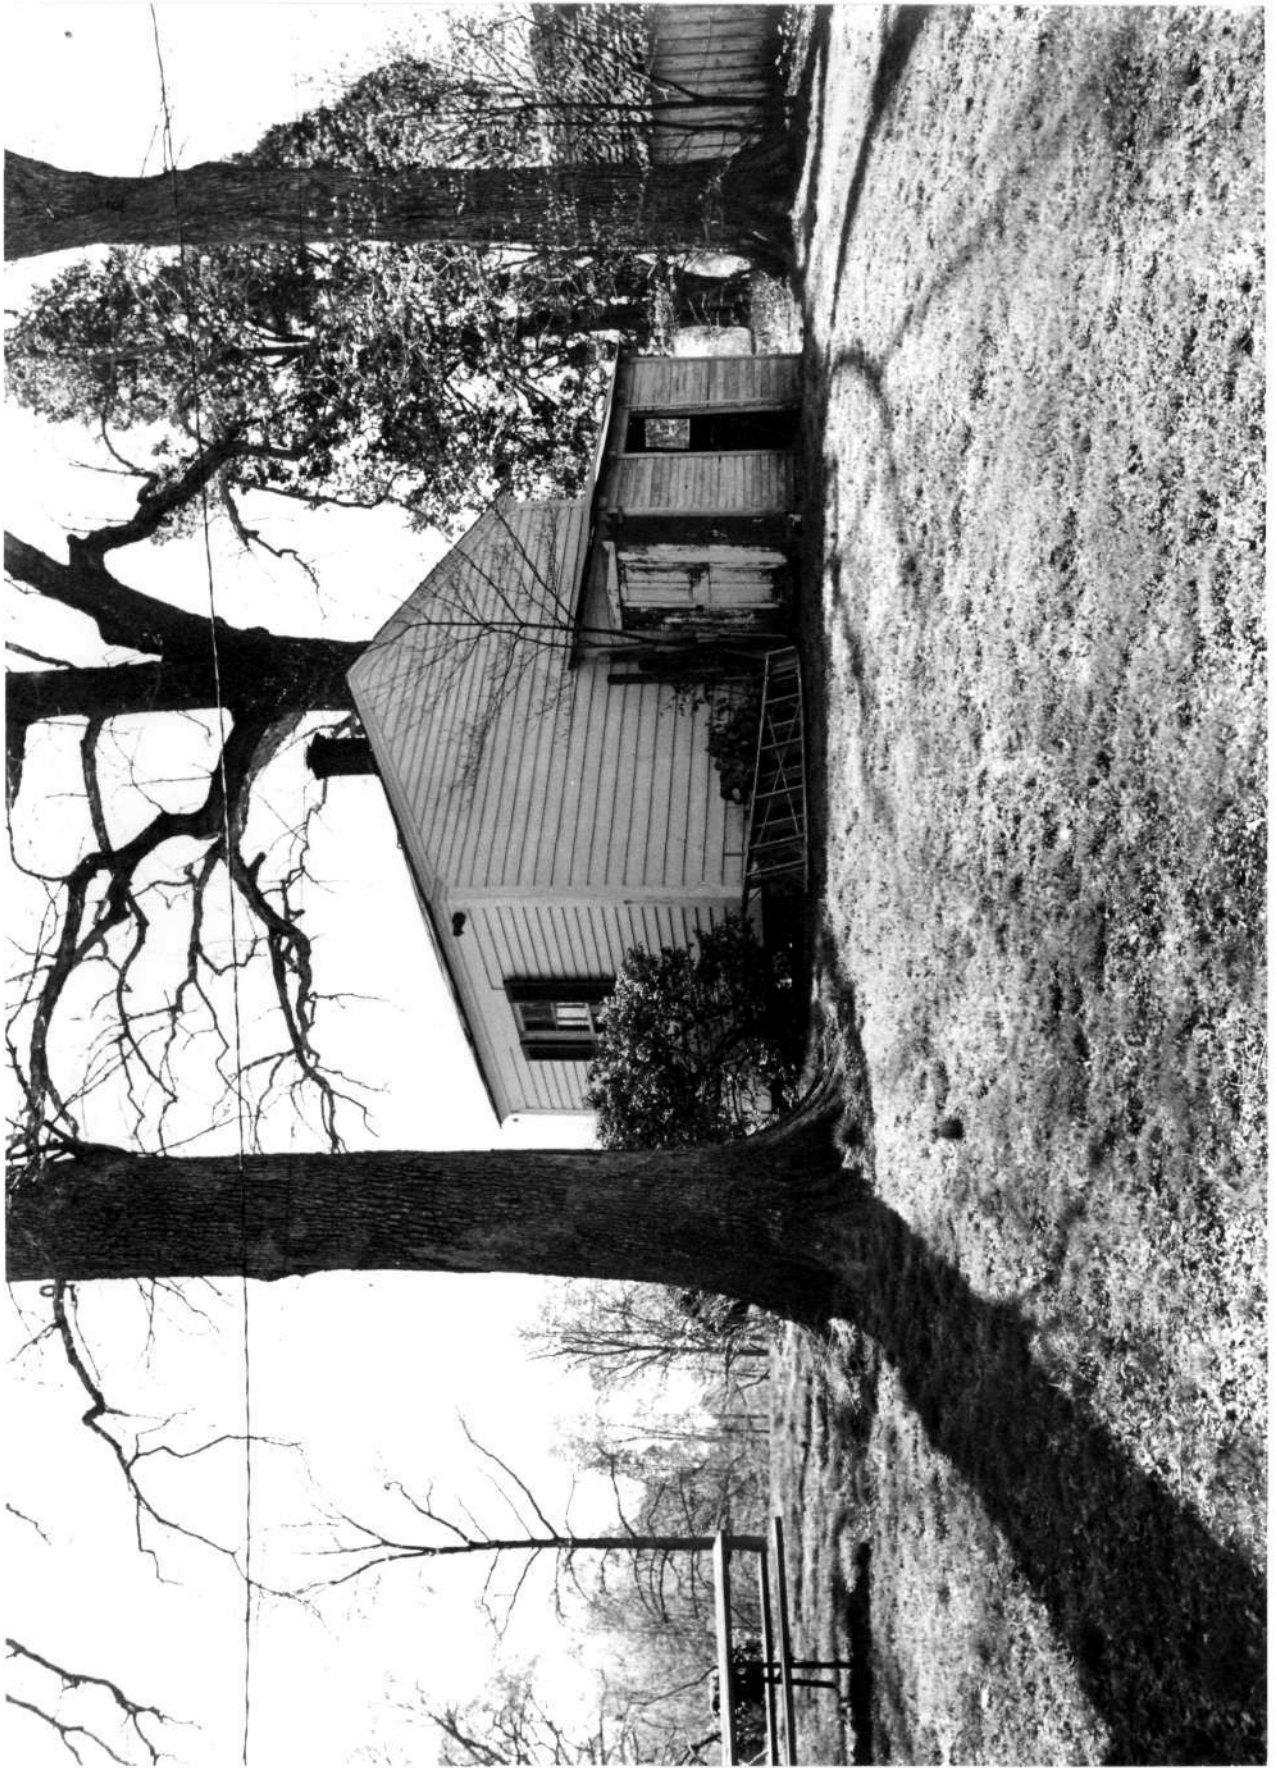

Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Office from Northwest

SCALE:  
PREPARED 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH





AA-212

Arden

outbuilding, west elevation

Photo by J.A.C.

5/1977



Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Looking east from Main House  
entrance

SCALE:

PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Looking Northeast from Main House  
entrance

SCALE:


PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH



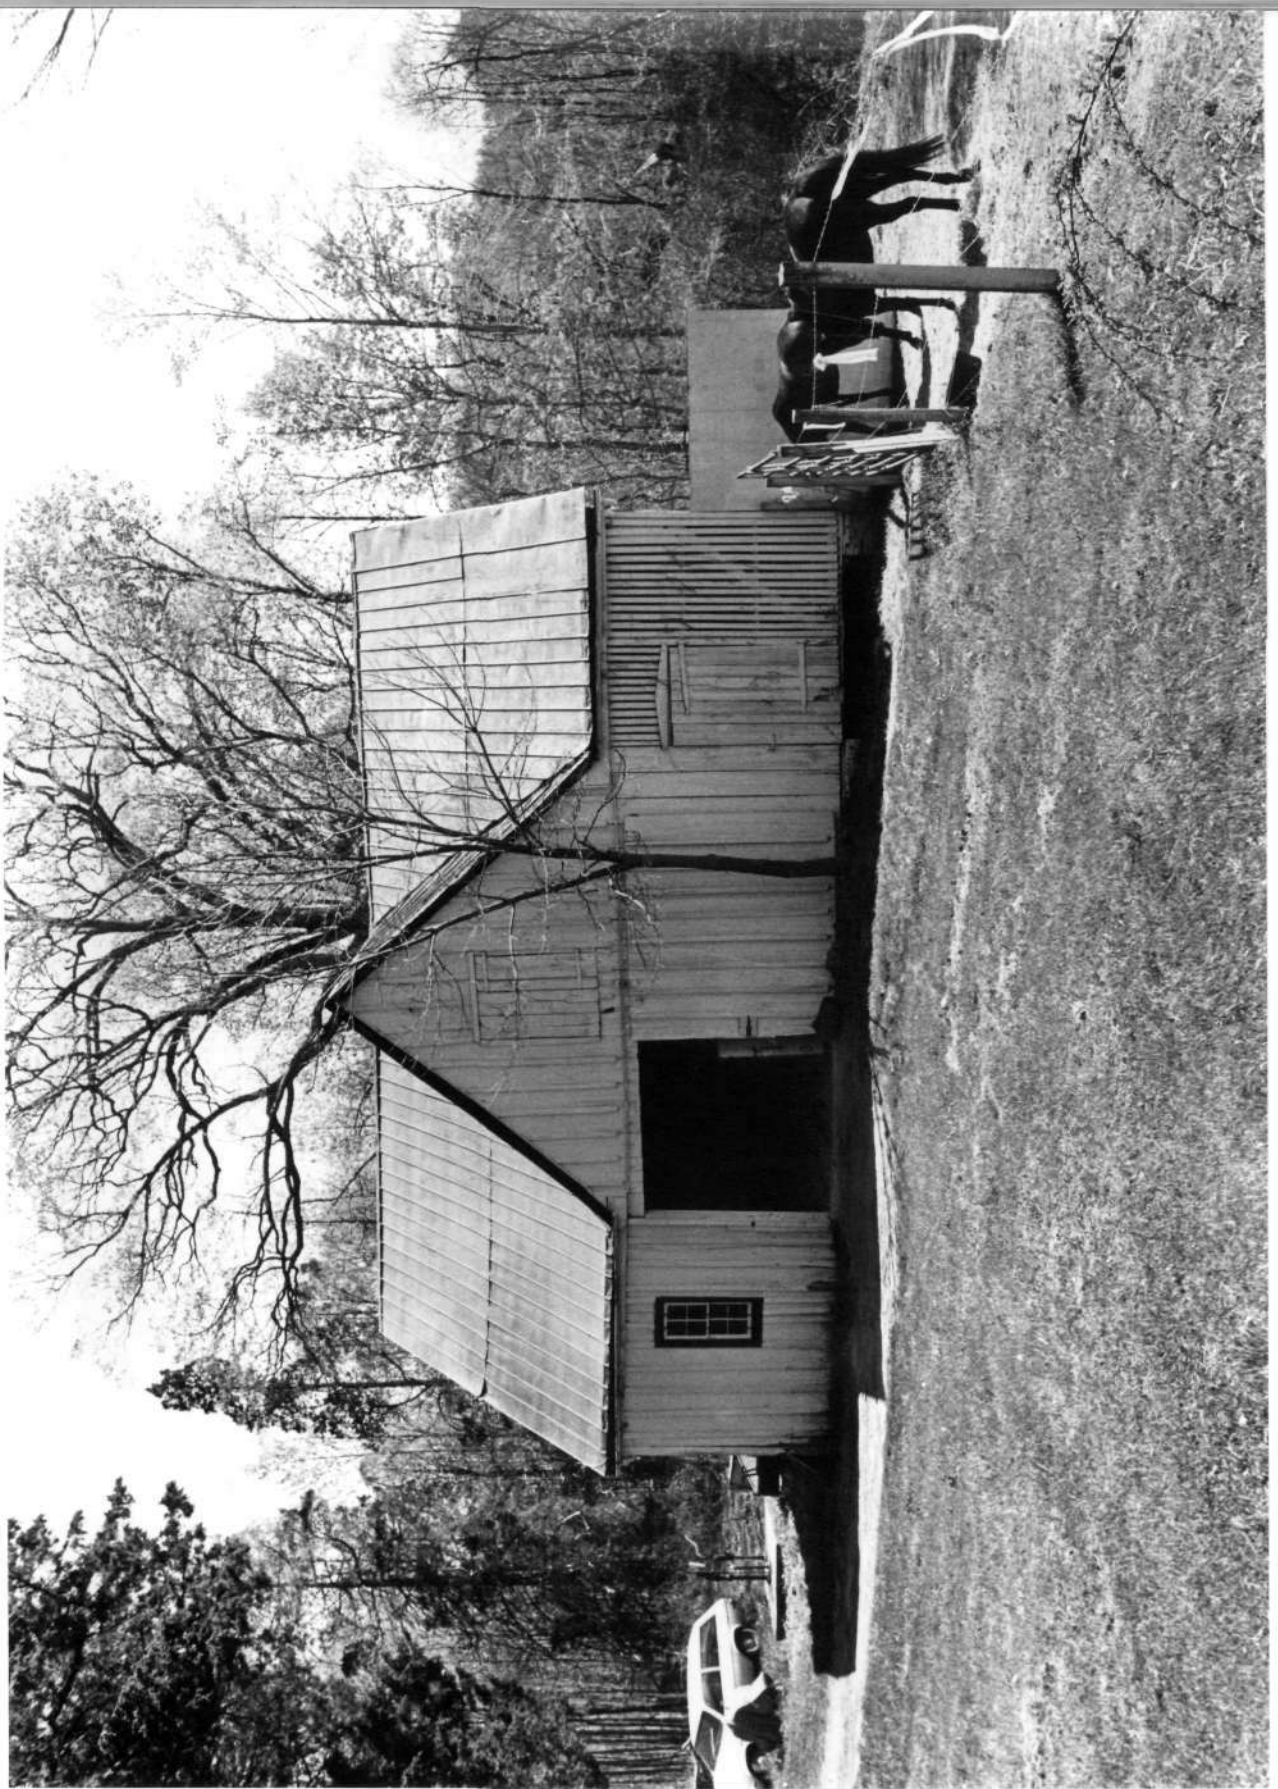

Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Barn, West facade

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212

EASEMENT EXHIBIT NO. NA

Barn, North facade

SCALE:  
PREPARED: 5/77 JAC  
MARYLAND HISTORICAL TRUST

NORTH






AA - 212A

ARDEN SLAVE HOUSE

circa 1940?

Harwood, A.A. Co. MD

SE corner

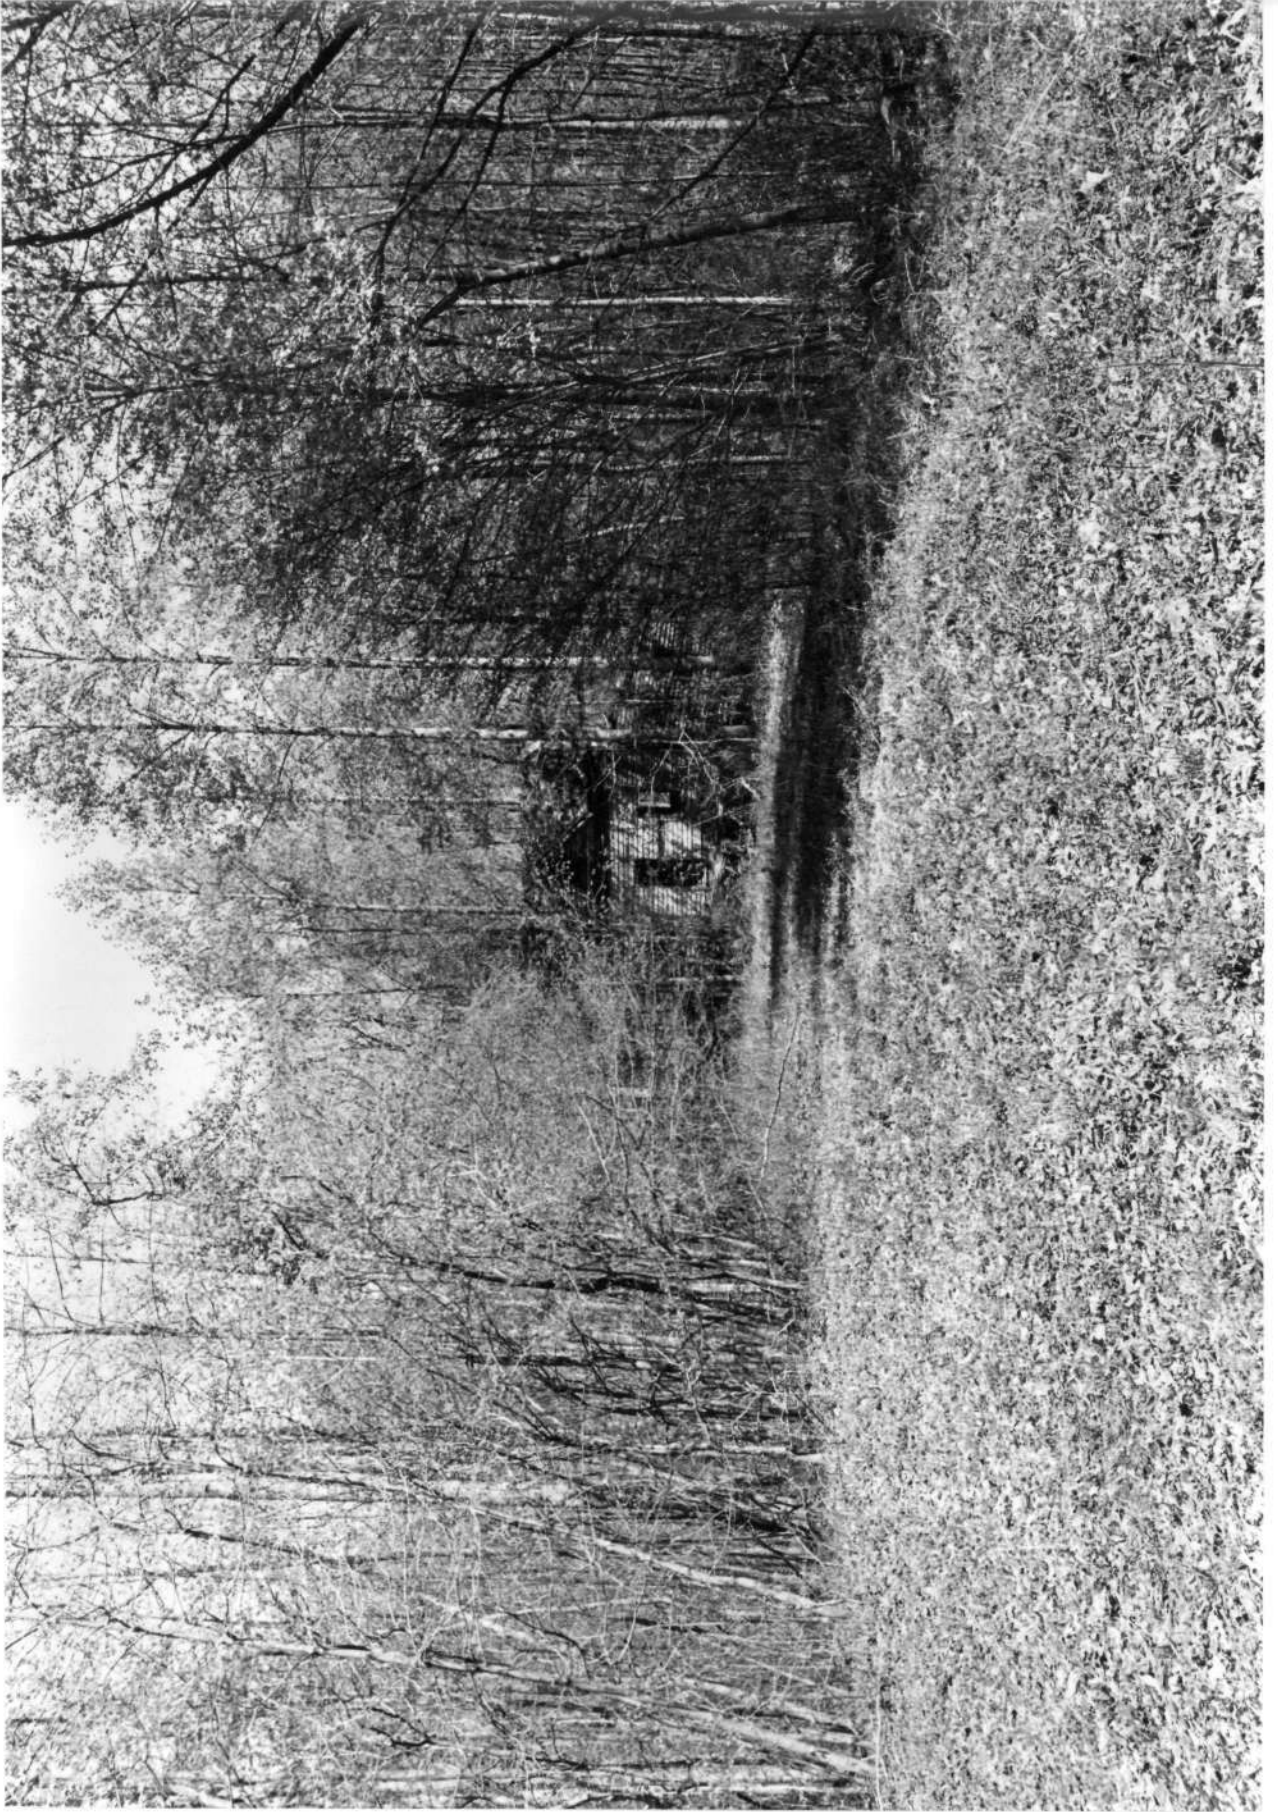

Arden  
Harwood  
Anne Arundel County

AA-2124

Tenant House from South

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

EASEMENT EXHIBIT NO. NA

NORTH





Arden  
Harwood  
Anne Arundel County

AA-212A

EASEMENT EXHIBIT NO. NA

Tenant House, south facade

SCALE:

PREPARED: 5/77

JAC

MARYLAND HISTORICAL TRUST

NORTH





AA-212A

Arden Slave House

Photo by J.A.C.

5/1977

Southwest Corner